

NEOCHEM

CORE

Heavy-Duty Standardized Chemical Pumps
PFA-lined with Magnetic Coupling



Reinventing
flow.
Since 1964

NEOCHEM CORE

Heavy-Duty Standardized Chemical Pumps

PFA-lined, with magnetic coupling according to ISO 2858 standard

Housing and impeller materials

PFA

Elastomers

EPDM, FKM (e. g. Viton®), PTFE+FKM


Bearing materials

Carbon, PTFE-CF, SSiC


The NEOChem Core is a modern, chemically resistant plastic magnetic pump for demanding industrial applications. It combines a sealless magnetic drive with a high-strength armored outer construction and PFA lining, offering high corrosion resistance and robustness even under harsh operating conditions. Additional features such as a Back-Pull-Out maintenance design and a flow-through bearing cooling system ensure reduced maintenance cycles and high availability.

Performance Overview

50 Hz

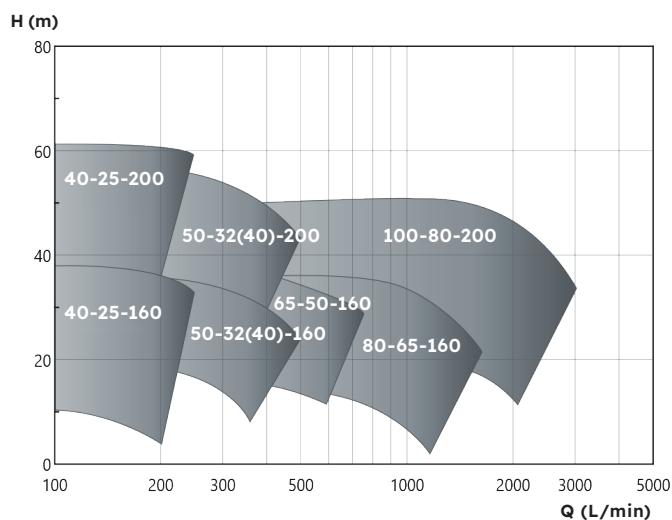

60 Hz

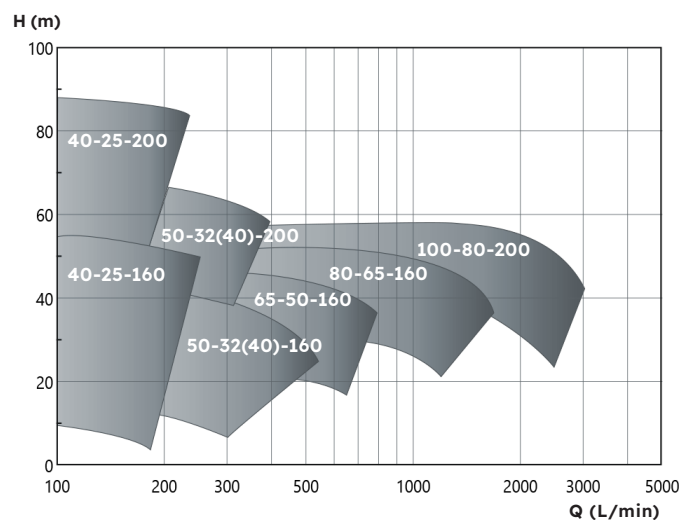

Heavy-Duty Standardized Chemical Pumps PFA-lined with Magnetic Coupling

Advantages

- + Hermetically sealed and completely leak-free – sealless magnetic coupling (no mechanical seal), ensuring no leakage risk and maximum operational safety for expensive or environmentally hazardous media.
- + Ideal for toxic, aggressive, and high-purity media: The PFA lining combined with a robust armored outer shell provides outstanding corrosion protection and prevents contamination.
- + Back-pull-out design – fast service and replacement of the hydraulic/magnetic assembly without removing the piping, enabling minimal downtime.
- + Suitable for high process temperatures up to +150 °C

High-Strength Outer Construction

Excellent corrosion resistance and robustness

Back-Pull-Out

Fast service and replacement of the hydraulic/magnetic assembly



Description

Characteristics

Chemical-resistant, single-stage, PFA-lined plastic centrifugal pump in close-coupled design per ISO 2858, with magnetic coupling, normal-priming

Features

- Hermetically sealed and absolutely leak-free (no shaft seal)
- Contact-free magnetic coupling with high-performance magnets
- All wetted parts made of corrosion-resistant PFA
- Standard flange connections according to ISO, JIS, or ANSI

Fields of application

Pumping of acids, alkalis, or other corrosive, harmful, or toxic liquids in applications where even the smallest leaks are unacceptable and a hermetically sealed pump is required.

Pumping of high-purity or sensitive liquids where contamination must be prevented.

Typical uses:

Chemical and pharma industry—process and transfer (e.g. tanker unloading, bulk transfer)

Characteristics

Available materials

- Housing: PFA-lined
- Elastomers: EPDM, FKM (e.g. Viton®), PTFE+FKM
- Bearing materials: Carbon, PTFE-CF, SiC

Standard motors

(available from stock)

- Three-phase motors: Δ 230/Y400 V, 3-ph @ 50 Hz; Y460 V, 3-ph @ 60 Hz; IP55, Class F, with PTC as standard
- All three-phase motors from 0.75 kW comply with energy efficiency class IE3
- Single-phase motors: up to 1.1 kW: 230 V, 1-ph, 50/60 Hz, IP55, Class F
- ATEX-certified motors (temperature rating T3)

Special motors

(on request)

- Special voltages and frequencies
- Three-phase motors with integrated frequency converter
- ATEX-certified motors with flameproof enclosure and temperature rating T4
- Four-pole motors with 1450 rpm @ 50 Hz / 1650 rpm @ 60 Hz
- UL- and CSA-certified motors
- Special types of protection, e.g., IP65
- Special insulation classes, e.g., tropical insulation
- Multi-voltage, e.g., Δ 220-290/Y380-500 V @ 50 Hz; Δ 220-332/Y380-575 V @ 60 Hz
- Direct-current motors (DC or BLDC)

Operating conditions



- Max. flow rate: 180 m³/h
- Max. head: 88 m
- Medium temperature: 0 to 150 °C
- Drive power: 1.5 to 30 kW

Accessories



A comprehensive range of accessories is available for all Schmitt pumps, facilitating seamless integration into your system:

- + Flange adapters
- + Hose connectors
- + Weld-on fittings for stainless steel piping
- + Reducers and expanders
- + NPT-threaded adaptors
- + Inlet strainers for vertical pumps
- + Extension pipes for vertical pumps



Performance Curve NEOCHEM CORE 40-25-160

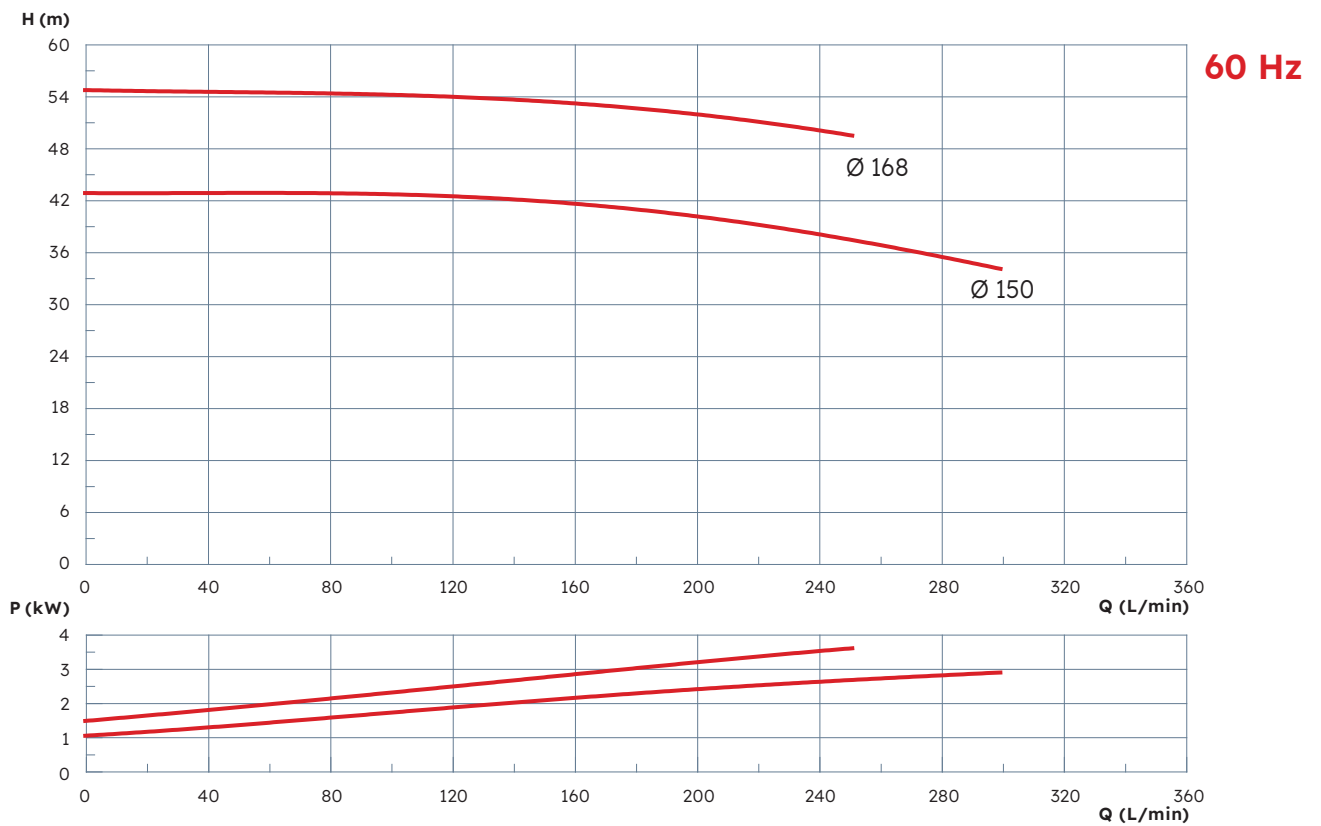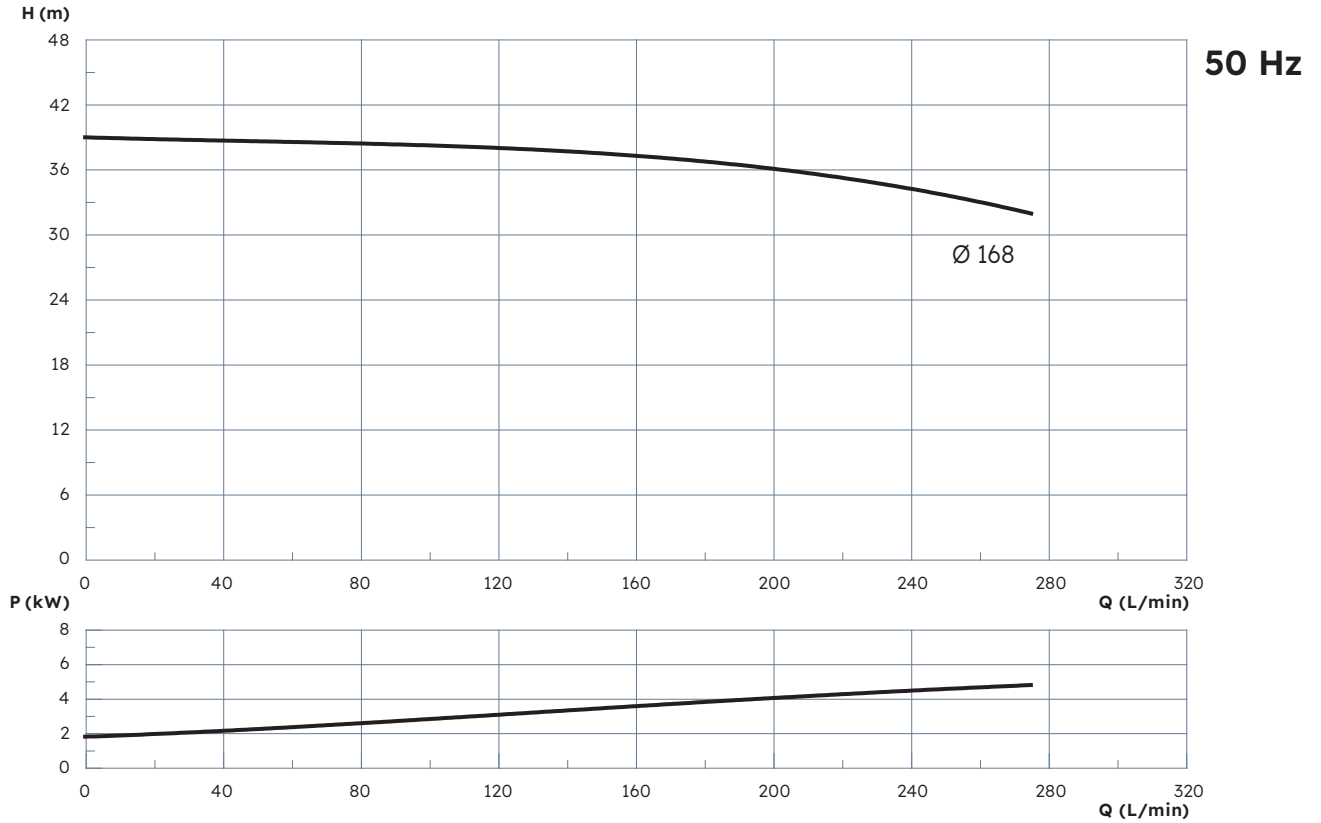



Performance Curve NEOCHEM CORE 40-25-200

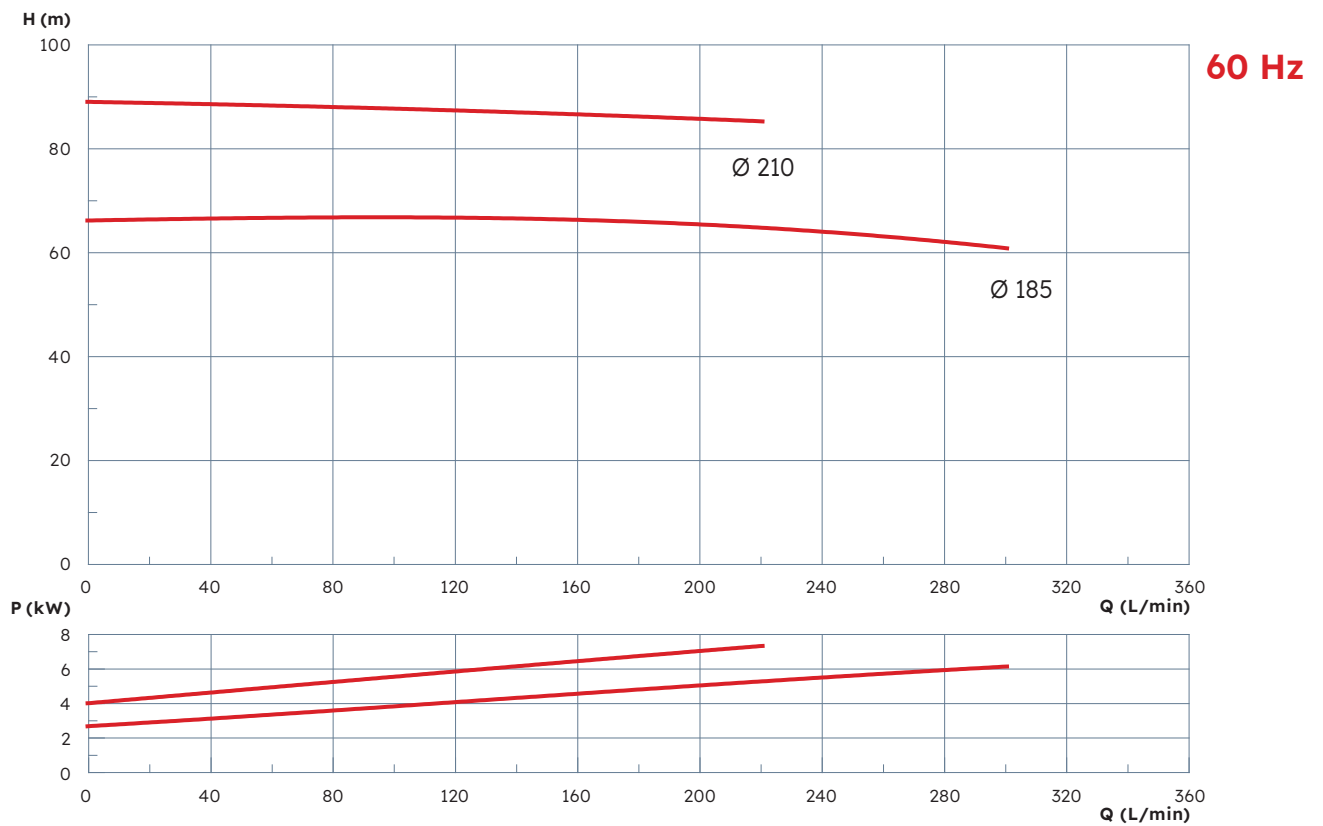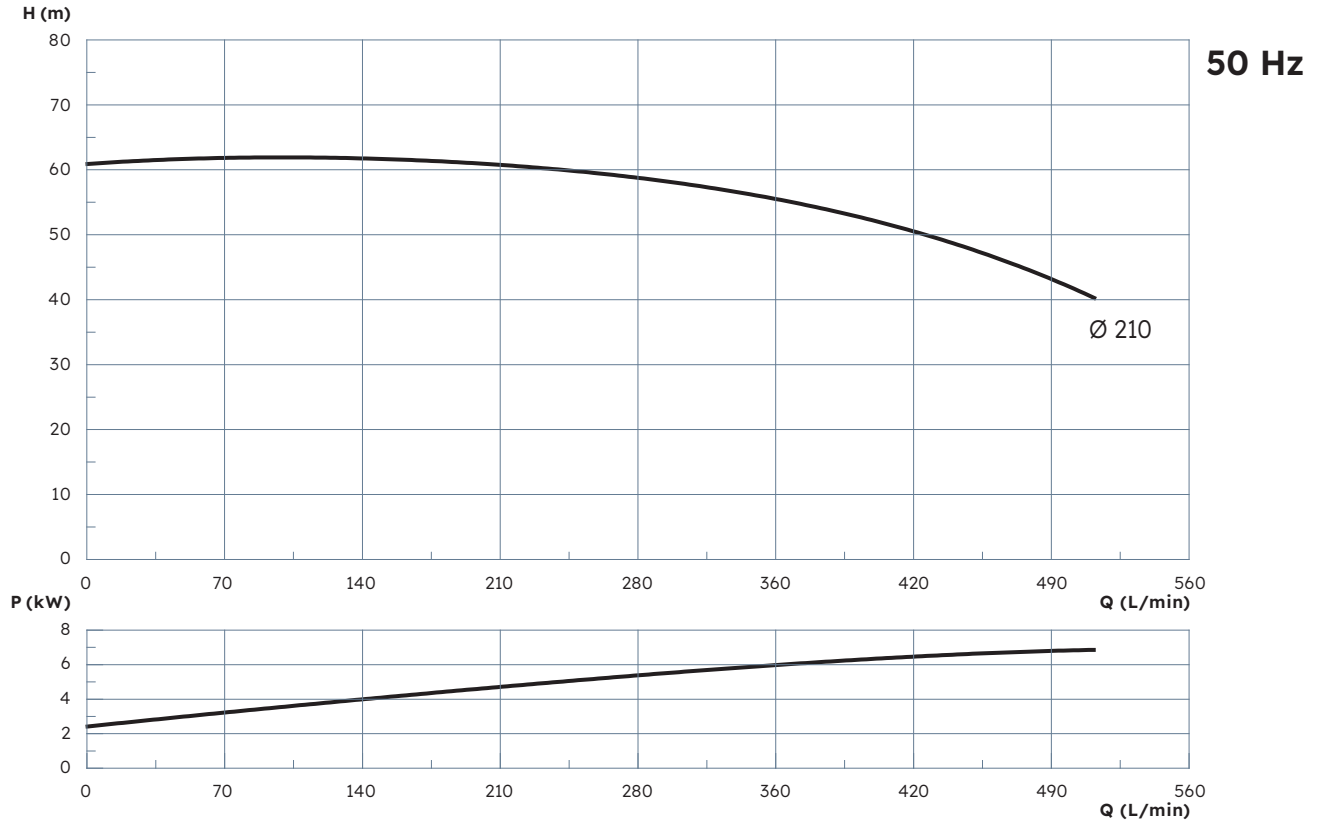



Performance Curve NEOCHEM CORE 50-32(40)-160

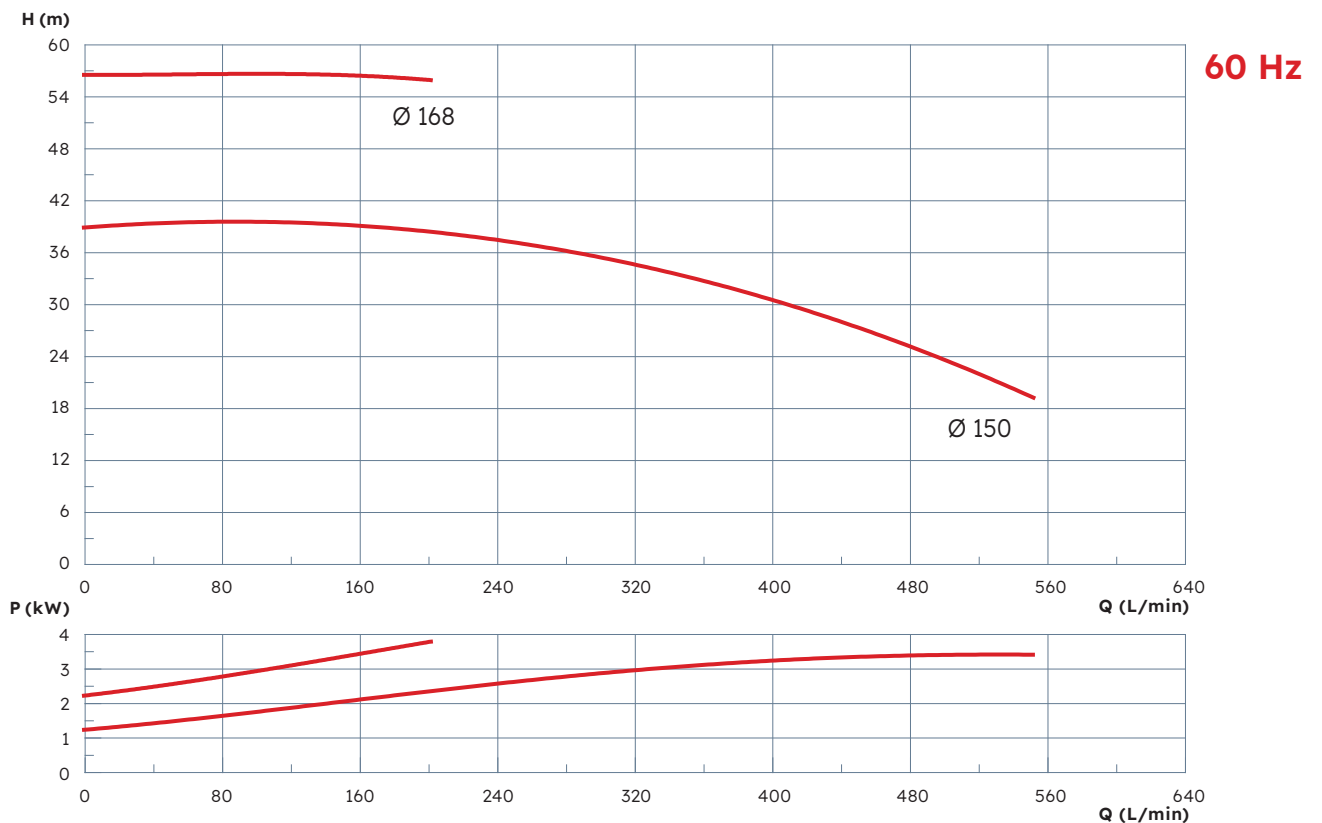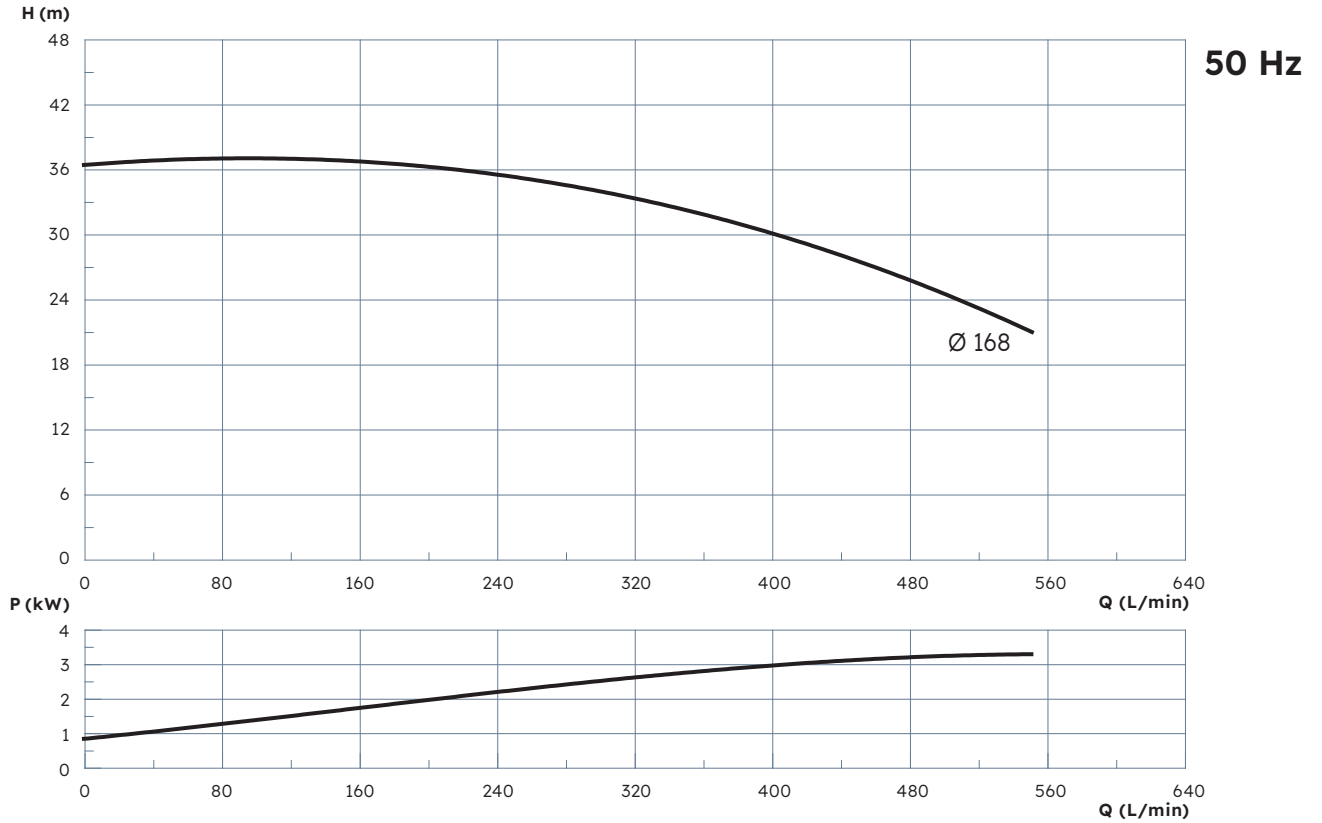



Performance Curve NEOCHEM CORE 50-32(40)-200

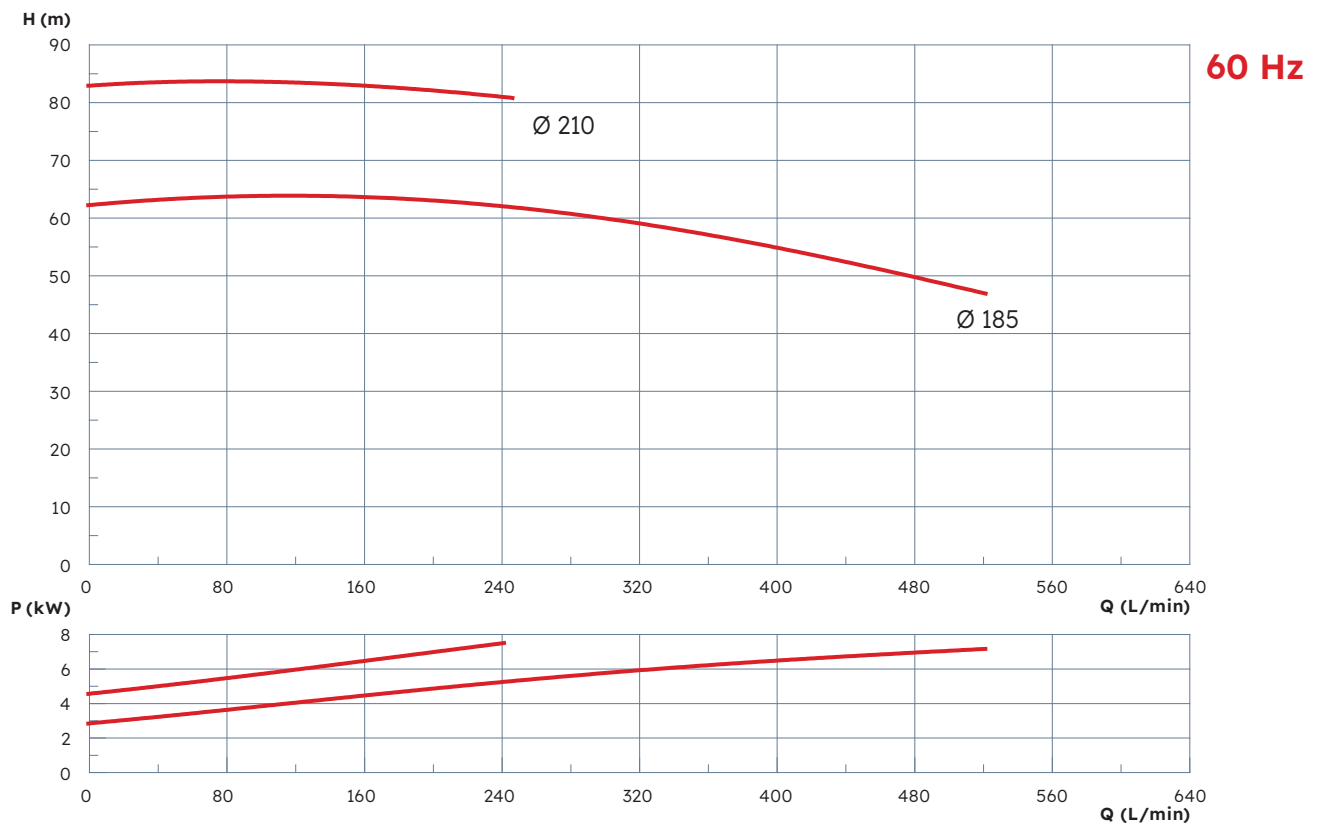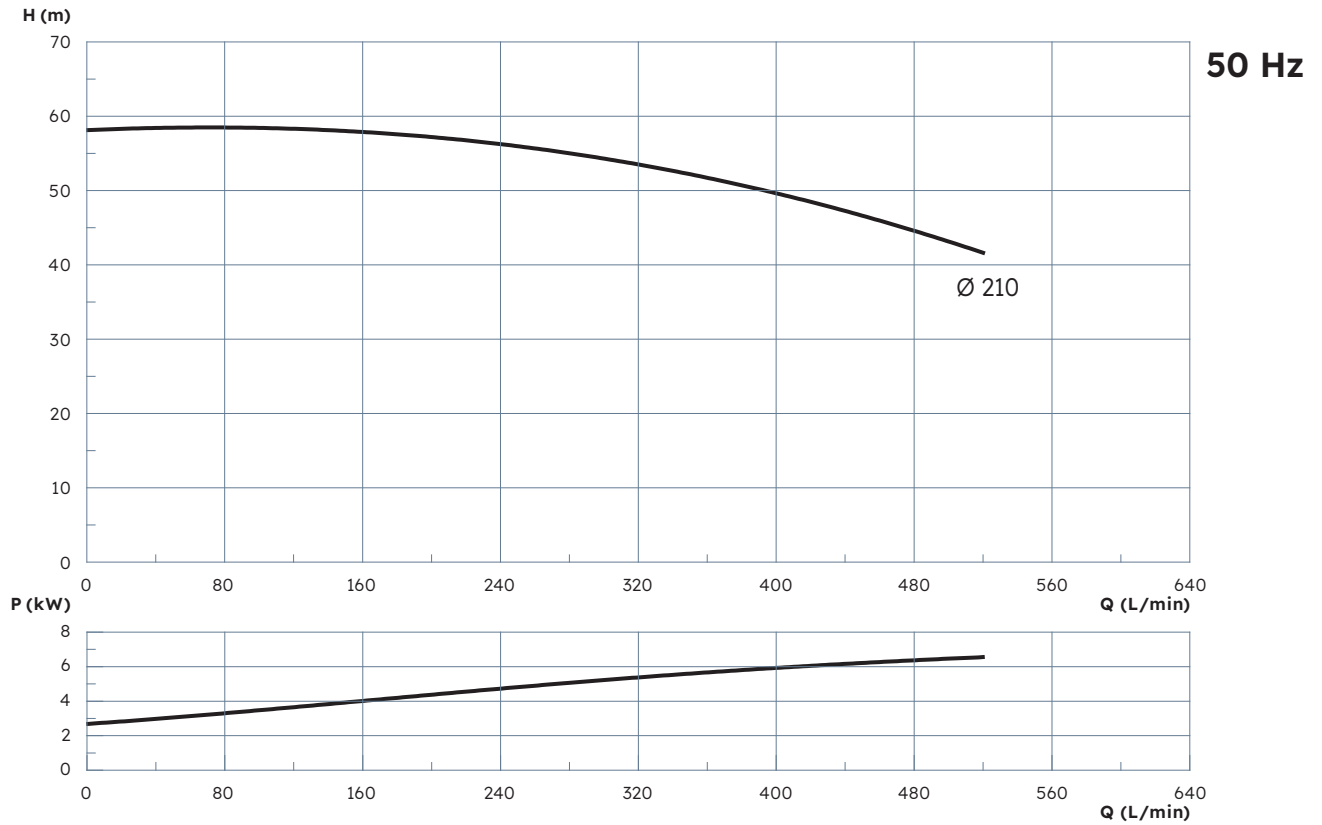



Performance Curve NEOCHEM CORE 65-50-160

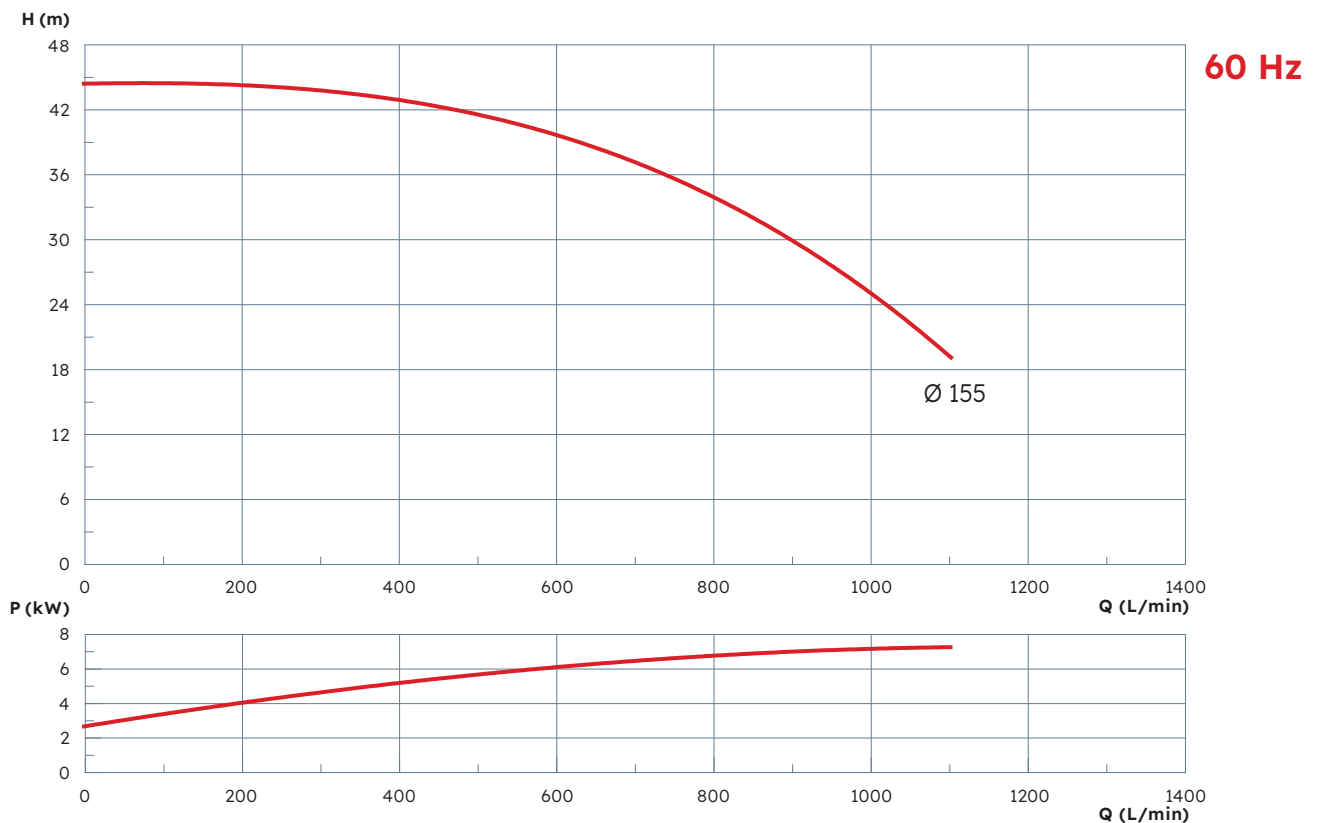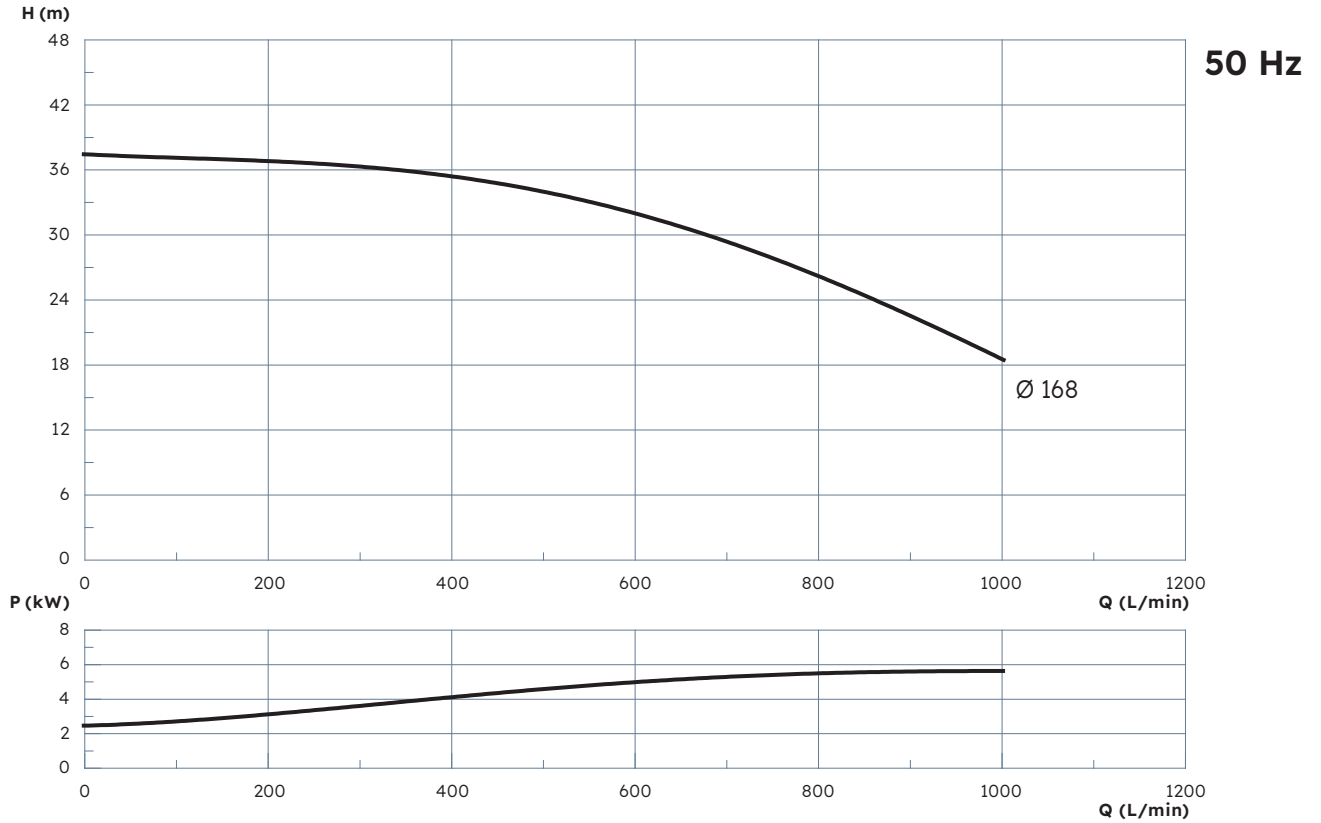


Performance Curve NEOCHEM CORE 80-65-160

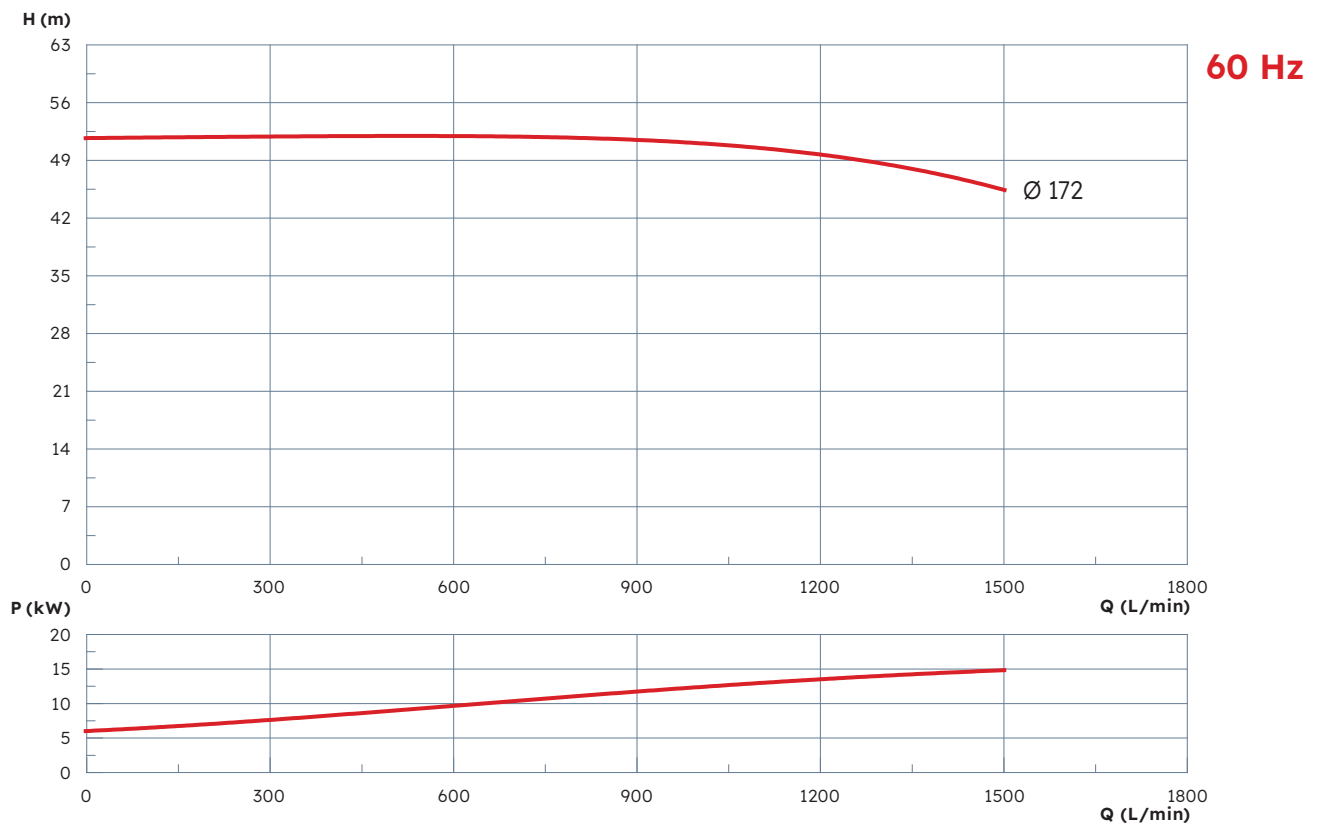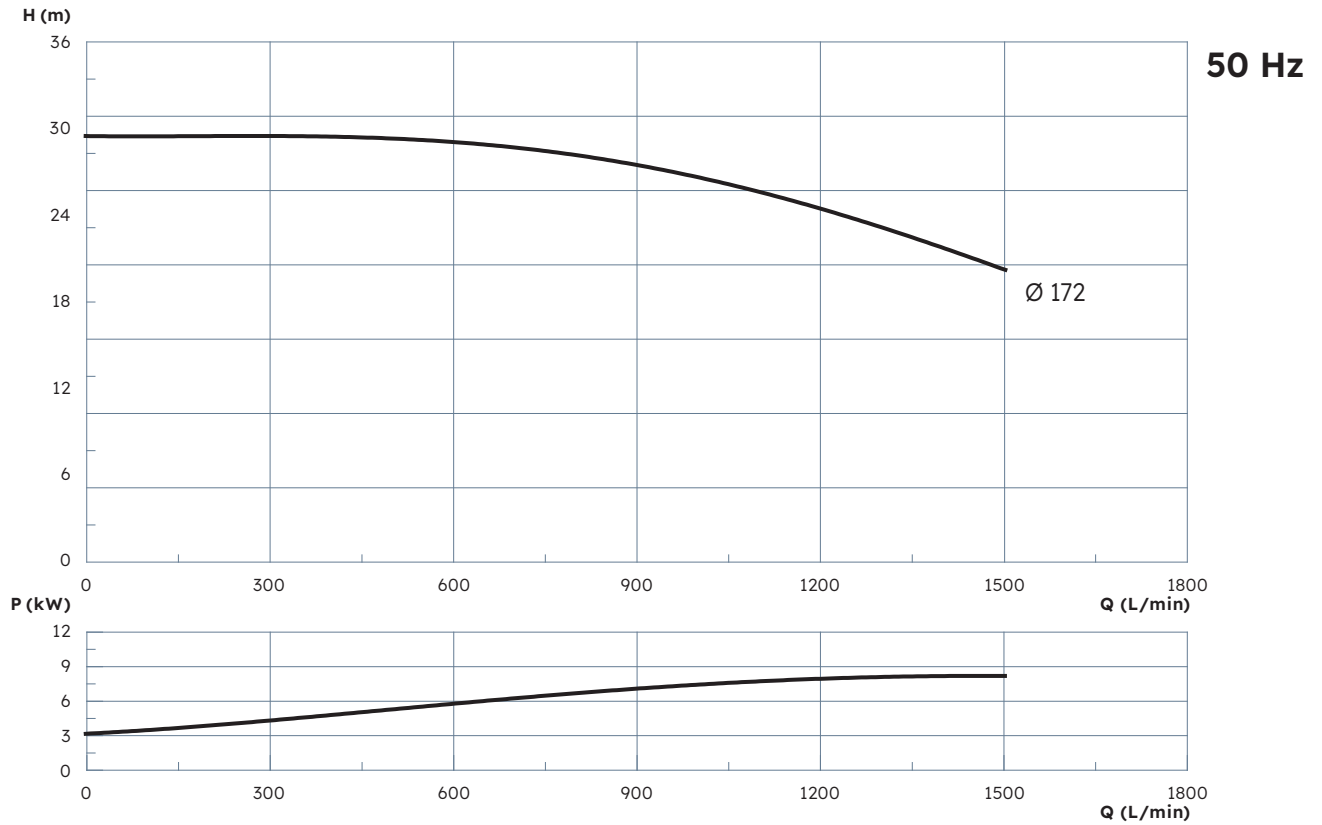

Performance Curve NEOCHEM CORE 100-80-200

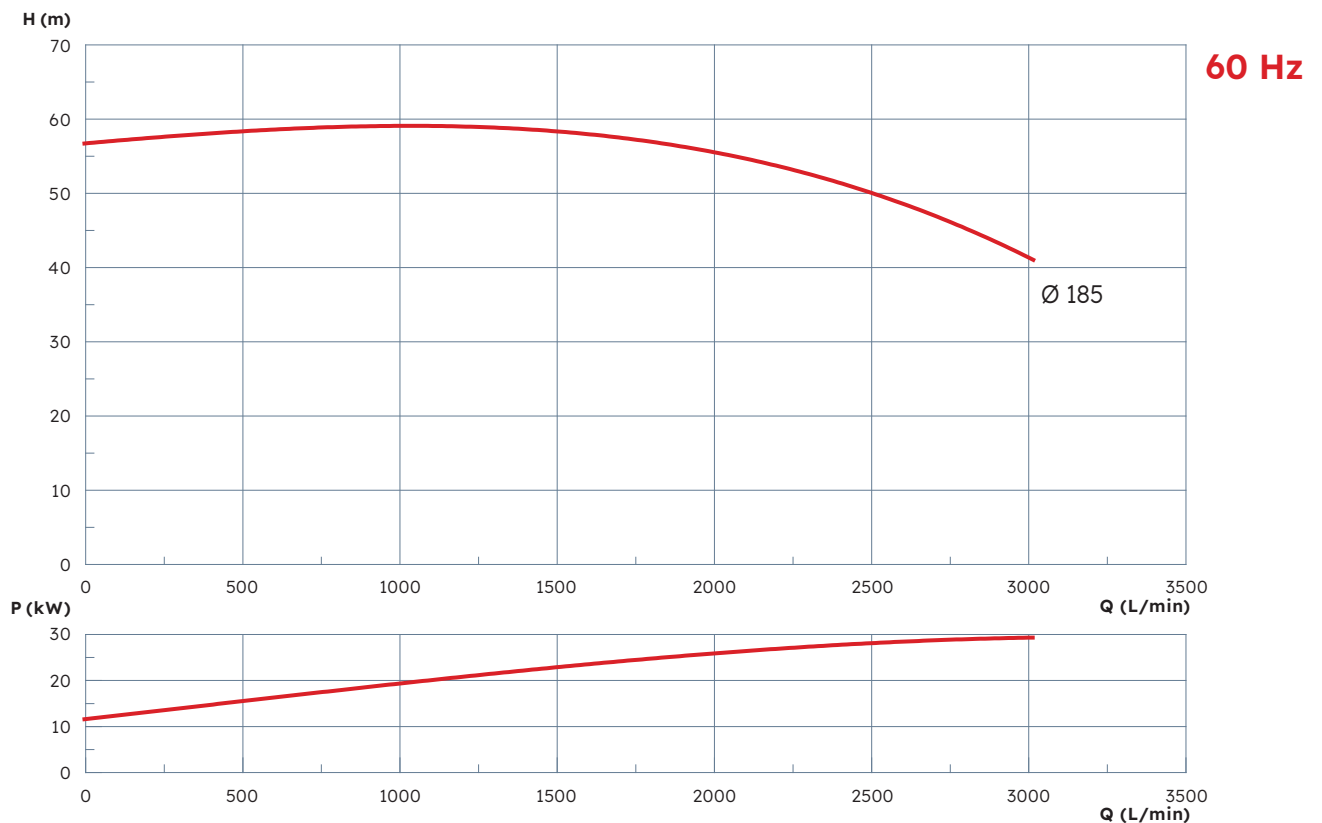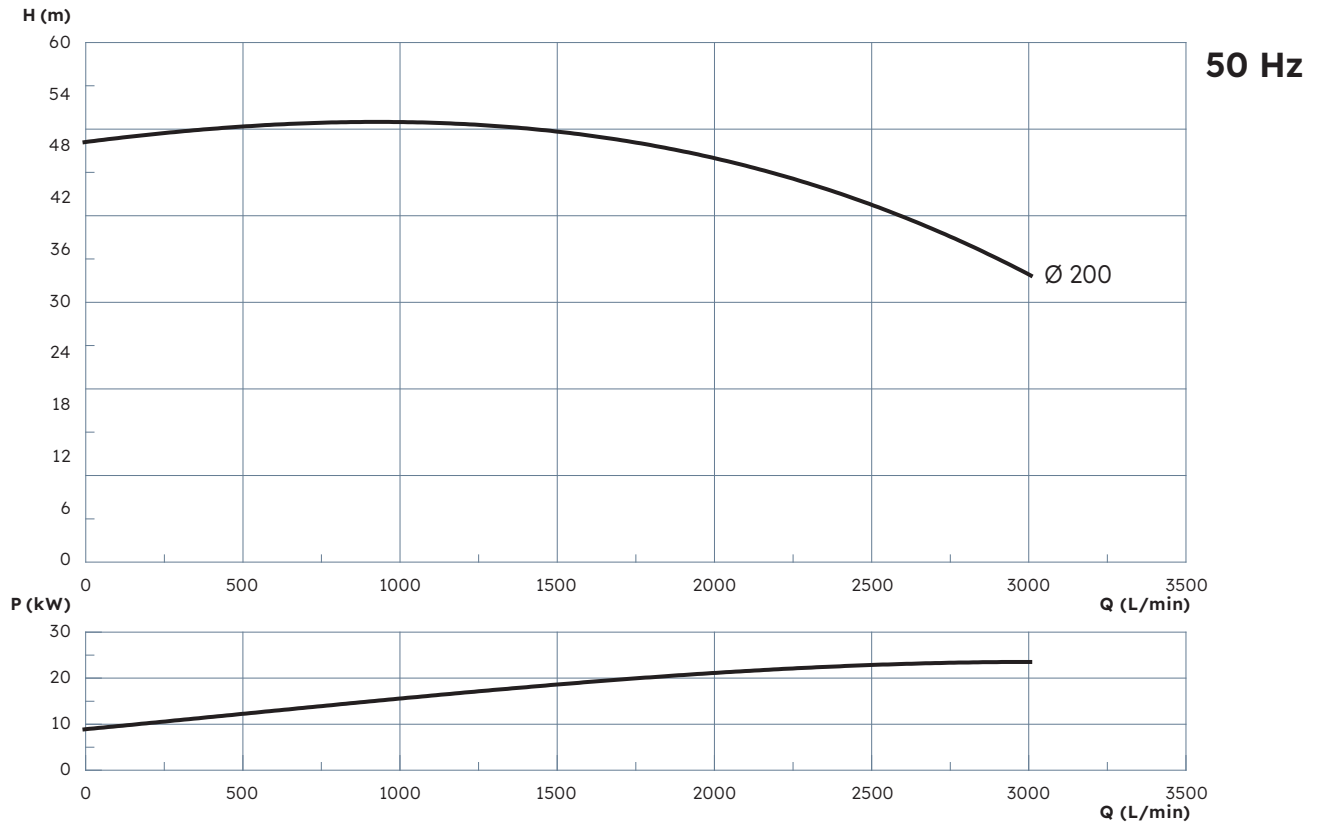

Spare Parts

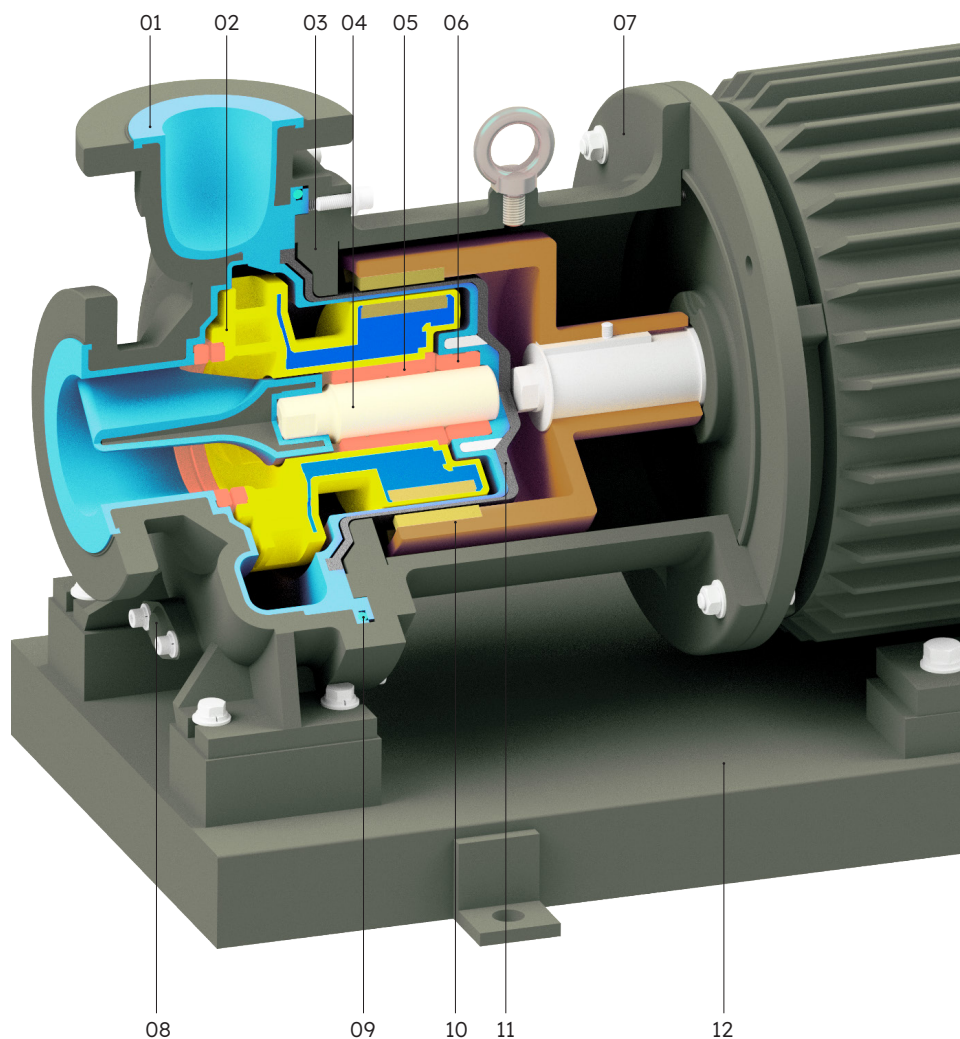


Position	Description	Available materials
01	Pump casing assembly	Casing: EN-GJS-450-10 (5.3107)+PFA Bearing ring: 995 Al ₂ O ₃ /SSiC
02	Impeller assembly	Front ring: SSiC Impeller: PFA+CF
03	Backup plate	EN-GJS-450-10 (5.3107)
04	Shaft	995 Al ₂ O ₃ /SSiC
05	Bearing	SSiC /PTFE+CF/Carbon
06	Rear thrust ring	SSiC /PTFE+CF
07	Bracket	EN-GJS-450-10 (5.3107)
08	Drain cap	EN-GJS-450-10
09	O-Ring	EPDM/FKM/FKM+FEP
10	Drive magnet	Nd-Fe-B
11	Containment shell	PFA , CARBON FRP
12	Base plate	Stainless Steel (1.4301) (AISI 304)

NIFEOCO

COREO



CHEM

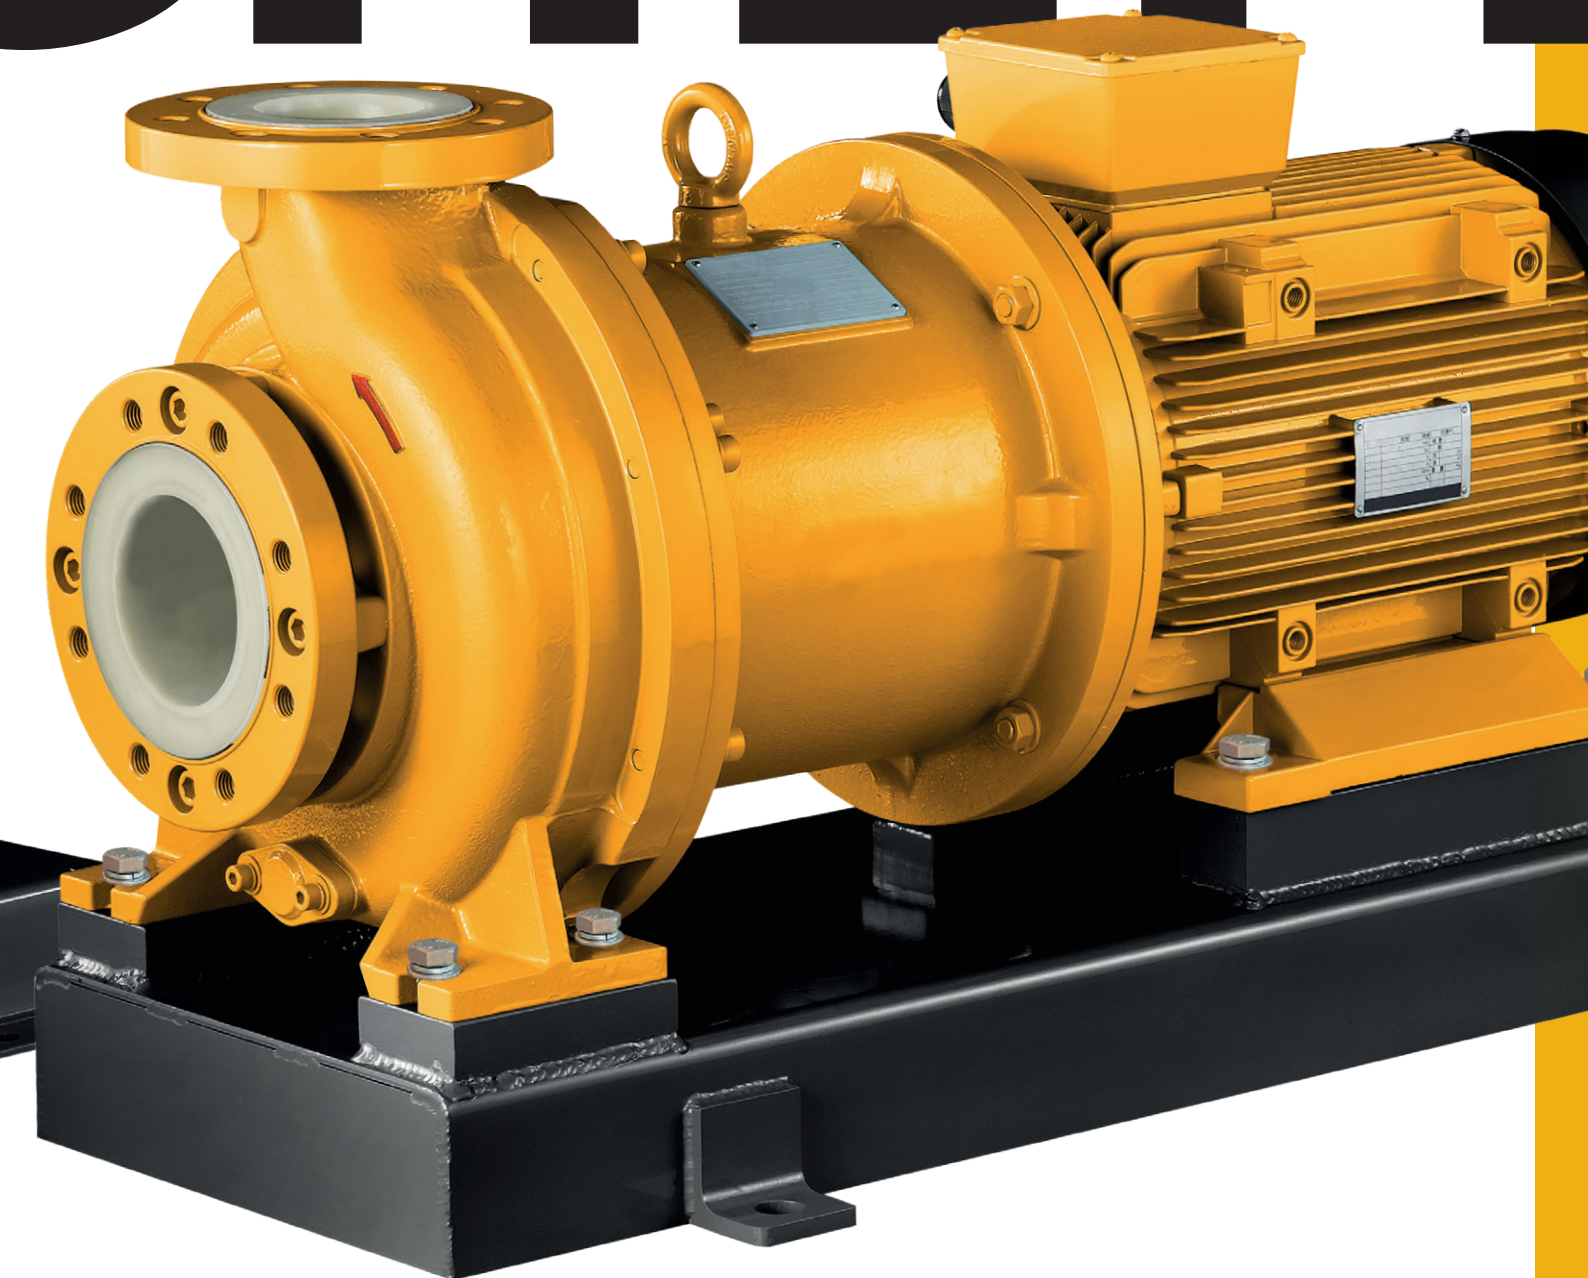

SCHMITT

Reinventing flow. Since 1964

NHM
Normal-Priming Centrifugal Pumps
Made of PVDF or PP with Magnetic Coupling



SCHMITT

Reinventing flow. Since 1964

MPN
Normal-Priming Centrifugal Pumps
Made of PVDF or PP with Magnetic Coupling



SCHMITT

Reinventing flow. Since 1964

U
Normal-Priming Centrifugal Pumps
Made of PVDF or PP with Single Mechanical Seal



SCHMITT

Reinventing flow. Since 1964

T
Sealless Vertical Centrifugal Pumps
Made of PVDF or PP Dry-Run Safe



SCHMITT

Reinventing flow. Since 1964

UP | UP-DO
Normal-Priming Centrifugal Pumps
Made of Stainless Steel with Single or Double Mechanical Seal



SCHMITT

Reinventing flow. Since 1964

SMP
Self-Priming Centrifugal Pumps
Made of PP with Magnetic Coupling



SCHMITT

Reinventing flow. Since 1964

P
Normal-Priming Turbine Pumps
Made of PVDF or PP with Magnetic Coupling



SCHMITT

Reinventing flow. Since 1964

NEOCHEM BASE
Standardized Chemical Pumps
ETFE-lined with Magnetic Coupling



SCHMITT

Reinventing flow. Since 1964

NEOCHEM CORE
Heavy-Duty Standardized Chemical Pumps
FFA-lined with Magnetic Coupling

